Technical Data Sheet

ILT Switch By Draper

USES:

Up, Down and Stop control of an ILT motor via wall switch. This switch must be used for setting limits. Limits are not factory set and must be done on site with this item. It can also be used to control the motor. Connects to the ILT motor using 4-conductor modular cable (RJ9) (included).

COMPATIBILITY:

The ILT Wall Switch can only be used with Intelligent (ILT) Motors. Other controls may be connected to the ILT Motor simultaneously):

a. Radio frequency remote control package.*
b. Infrared remote control package.*
c. SP-KSM Momentary Power Supply Key Switch (On-off).
d. KS-3 3-Position Key Control.
e. SP-KPS-1 3-Position Switch with Hinged Key-Locking Coverplate.

*Items noted with asterisk connect simultaneously through the use of a 4-Jack Modular Interface-Part No. C156.096)

Not compatible with any other controls or non-ILT motors.

CONTACTS:

Dry contacts, 4-conductor modular connector (RJ9).

DESCRIPTION:

The ILT switch is a 3-button (Up, Stop, Down) wall switch which controls an Intelligent Motor. Once the motor is connected then limits can be set and the screen can be operated. The buttons are square. There are no wire leads: there are Dry Contact terminals and modular inputs. The ILT switch fits into a single gang box and is supplied with a 25' RJ9 data cable.

PART NUMBER:

121171

ILLUSTRATION:

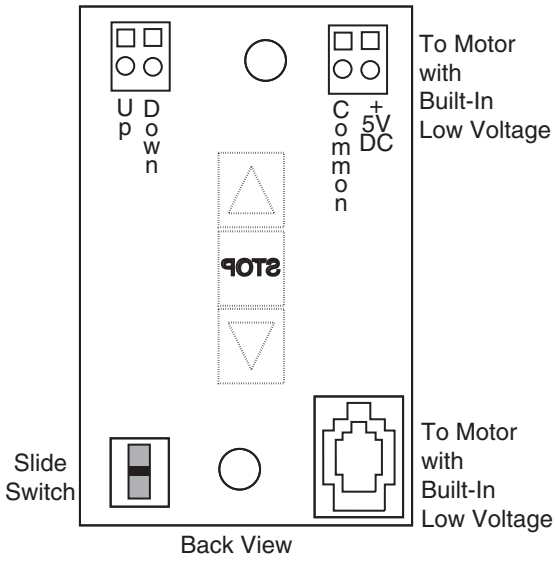

411 S. Pearl St., Spiceland, IN 47385 USA ▮ 765-987-7999
www.draperinc.com ▮ fax 765-987-7142

Copyright ©2009 Draper Inc. Form ILTSwitch_TechDataSheet10 Printed in U.S.A.